

# Harvest the Sunshine

# JA SOLAR

# 605W



## JAM66D42 MB n-type Double Glass Bifacial Modules

### Premium Cells

n-  
Bycium+  
16BB

MBB Half-Cell  
Technology

# 26%



Cell Conversion  
Efficiency


### Premium Modules

Higher power  
generation better LCOE

n-type with very  
Lower LID

Better Temperature  
Coefficient

Better low irradiance  
response

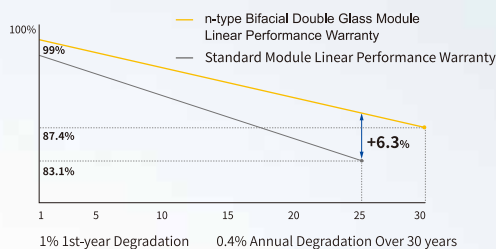

12-year product  
warranty

30-year linear power  
output warranty

### Comprehensive Certificates


- IEC 61215, IEC 61730, UL 61215, UL 61730
- ISO 9001: 2015 Quality management systems
- ISO 14001: 2015 Environmental management systems
- ISO 45001: 2018 Occupational health and safety management systems
- IEC 62941: 2019 Terrestrial photovoltaic (PV) modules - Quality system for PV module manufacturing



## DEEP BLUE 4.0 Pro

# JAM66D42 MB

n-type Double Glass Bifacial Modules

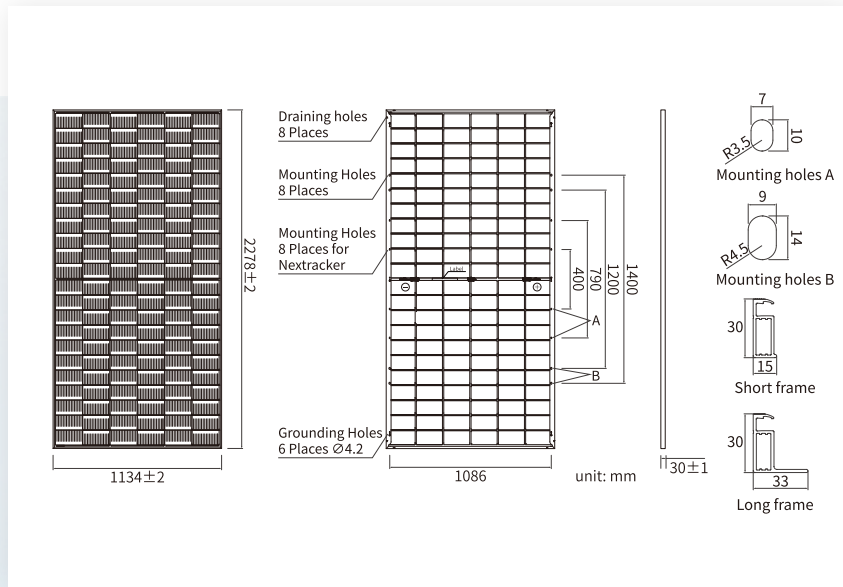

## MECHANICAL PARAMETERS

Cell	Mono
Weight	31.8kg
Dimensions	2278±2mm × 1134±2mm × 30±1mm
Cable Cross Section Size	4mm <sup>2</sup> (IEC), 12 AWG(UL)
No. of cells	132(6×22)
Junction Box	IP68, 3diodes
Connector	QC 4.10-351/ MC4-EVO2A
Cable Length (Including Connector)	Portrait: 300mm(+)/400mm(-) Landscape: 1300mm(+)/1300mm(-)
Front Glass/Back Glass	2.0mm/2.0mm
Packaging Configuration	36pcs/Pallet, 720pcs/40HQ Container

Remark: customized frame color and cable length available upon request

## ELECTRICAL PARAMETERS AT STC

TYPE	JAM66D42	JAM66D42	JAM66D42	JAM66D42	JAM66D42	JAM66D42
	-580/MB	-585/MB	-590/MB	-595/MB	-600/MB	-605/MB
Rated Maximum Power(Pmax) [W]	580	585	590	595	600	605
Open Circuit Voltage (Voc) [V]	48.18	48.38	48.58	48.78	48.98	49.19
Maximum Power Voltage(Vmp) [V]	40.42	40.63	40.84	41.03	41.24	41.44
Short Circuit Current(Isc) [A]	15.21	15.26	15.31	15.36	15.41	15.46
Maximum Power Current(Imp) [A]	14.35	14.40	14.45	14.50	14.55	14.60
Module Efficiency [%]	22.5	22.6	22.8	23.0	23.2	23.4
Power Tolerance	0~+3%					
Temperature Coefficient of Isc(α <sub>Isc</sub> )	+0.045%/°C					
Temperature Coefficient of Voc(β <sub>Voc</sub> )	-0.250%/°C					
Temperature Coefficient of Pmax(γ <sub>Pmp</sub> )	-0.290%/°C					
STC	Irradiance 1000W/m <sup>2</sup> , cell temperature 25°C, AM1.5G					


Remark: Electrical data in this catalog do not refer to a single module and they are not part of the offer. They only serve for comparison among different module types.

## ELECTRICAL CHARACTERISTICS WITH 10% SOLAR IRRADIATION RATIO

TYPE	JAM66D42	JAM66D42	JAM66D42	JAM66D42	JAM66D42	JAM66D42
	-580/MB	-585/MB	-590/MB	-595/MB	-600/MB	-605/MB
Rated Max Power(Pmax) [W]	626	632	637	643	648	653
Open Circuit Voltage(Voc) [V]	48.18	48.38	48.58	48.78	48.98	49.19
Max Power Voltage(Vmp) [V]	40.42	40.63	40.84	41.03	41.24	41.44
Short Circuit Current(Isc) [A]	16.43	16.48	16.53	16.59	16.64	16.70
Max Power Current(Imp) [A]	15.50	15.55	15.61	15.66	15.71	15.77
Irradiation Ratio (rear/front)	10%					

\* For Nexttracker installations, maximum static load please take compatibility approve letter between JA Solar and Nexttracker for reference.

## CHARACTERISTICS

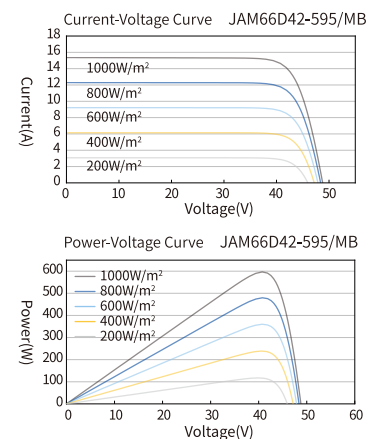

## OPERATING CONDITIONS

Maximum System Voltage	1500V DC
Operating Temperature	-40°C~+85°C
Maximum Series Fuse Rating	30A
Maximum Static Load, Front*	5400Pa(112 lb/ft <sup>2</sup> )
Maximum Static Load, Back*	2400Pa(50 lb/ft <sup>2</sup> )
NOCT	45±2°C
Bifaciality	80%±5%
Safety Class	Class II
Fire Performance	UL Type 29/Class C